


BUILDING & CONSTRUCTION

DIE No: 95702

DIE.NO.95702

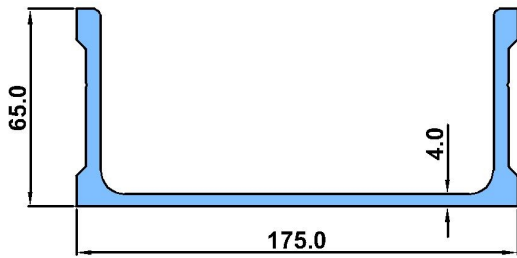


Wt 3.920 KG/M

GALCO

Wt. Range : 3.755-4.060

DIE No: 95772

DIE.NO.95772




Wt 2.560 KG/M

GALCO

Wt. Range : 2.360-2.740

DIE No: 95787

DIE.NO.95787

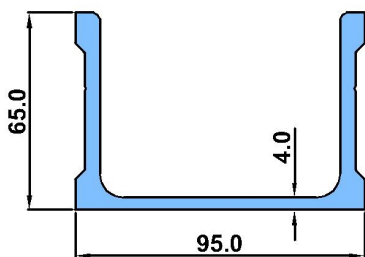

Wt 3.050 KG/M


GALCO

Wt. Range : 2.800-3.250

U CHANNEL 01

DIE No: 95703

DIE.NO.95703

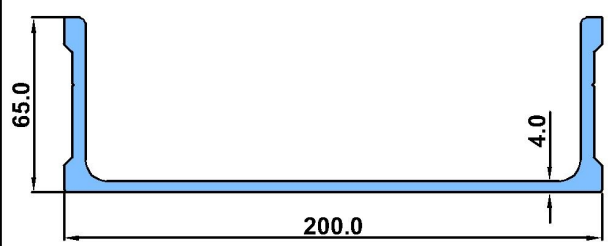


Wt 4.185 KG/M

GALCO

Wt. Range : 4.020-4.345

DIE No: 95786

DIE.NO.95786




Wt 2.940 KG/M

GALCO

Wt. Range : 2.710-3.140

DIE No: 95788

DIE.NO.95788

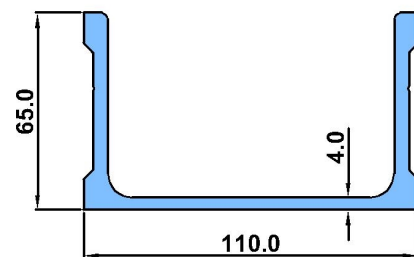


Wt 3.210 KG/M

GALCO

Wt. Range : 2.950-3.430


BUILDING & CONSTRUCTION

DIE No: 95789

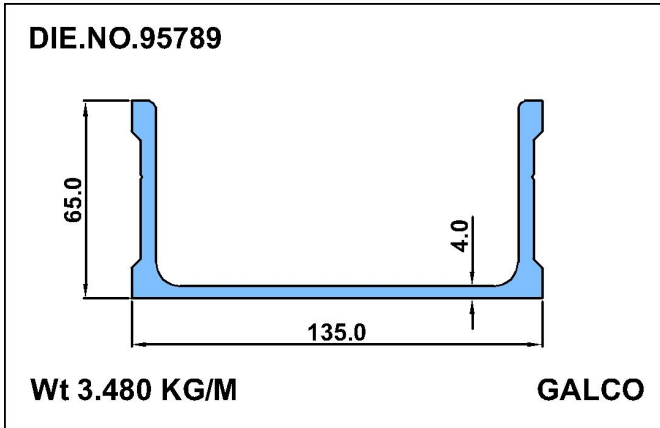

Wt. Range : 3.200-3.720


DIE No: 95813

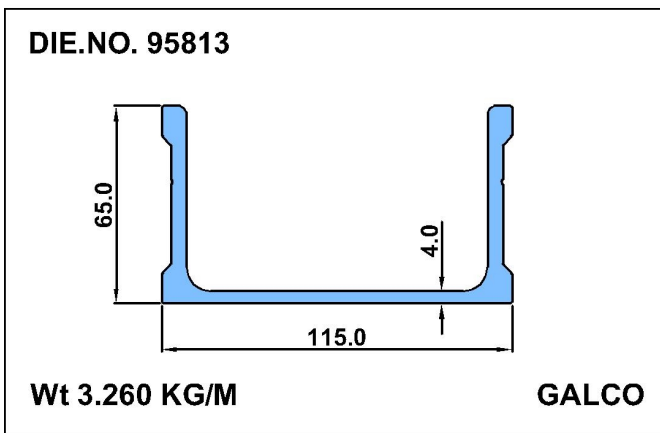

Wt. Range : 3.130-3.520

U CHANNEL 01

DIE No: 95790

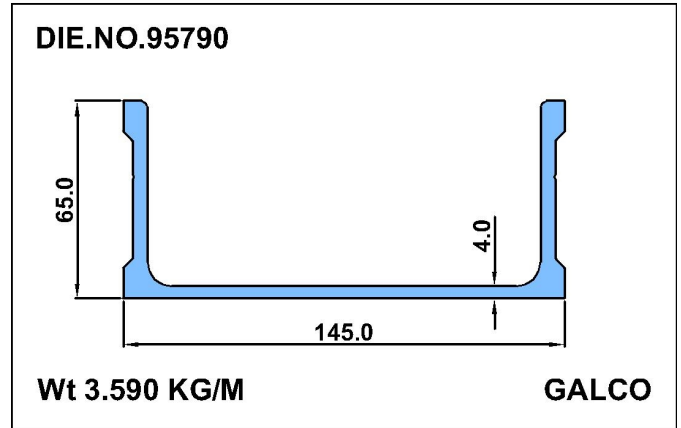

Wt. Range : 3.300-3.830